


Specification Sheet

Part Number: 553-50020

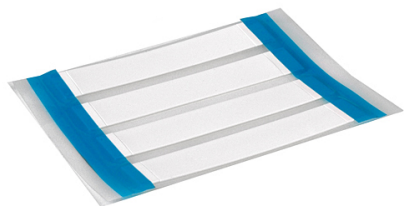

Heat Shrink Labels, Single Side, Unslit, .25" (6.35mm), PO-X, Yellow, 250/box

Article Number

553-50020

Type

HST6-2YE

Color

Yellow (YE)

Features & Benefits

- Slide Slit and optional center slits for easy wire insertion.
- Smooth surface for clean and legible printing.
- Supplied on a ladder style carrier so that markers can be kitted after printing.
- A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

Quantity Per

box

Product Description

HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.

| | |
|---------------------------------------|---|
| Short Description | Heat Shrink Labels, Single Side, Unslit, .25" (6.35mm), PO-X, Yellow, 250/box |
| Global Part Name | HST6-2YE-PO-X-YE |
| Variant | Thin-Wall |
| Width W (Imperial) | 1.9 |
| Width W (Metric) | 48.26 |
| Thickness T (Imperial) | .003 |
| Thickness T (Metric) | .0762 |
| Height H (Imperial) | 0.42 |
| Height H (Metric) | 10.67 |
| Width of Liner (Metric) | 76.2 |
| Width of Liner (imperial) | 3.0 |
| Outside Diameter OD(Imperial) | 0.25 |
| Outside Diameter OD(metric) | 6.35 |
| Outside Diameter Max(Imperial) | 0.25 |
| Outside Diameter Max (metric) | 6.35 |
| Wall Thickness WT (Imperial) | 0.028 |
| Wall Thickness WT (Metric) | 0.71 |

| | |
|-----------------|---------------------------------|
| Material | Polyolefin, cross-linked (PO-X) |
|-----------------|---------------------------------|

Material Shortcut PO-X

| | |
|--------------------|--------------------------|
| US MIL SPEC | MIL-STD-202G Method 215K |
|--------------------|--------------------------|

SAE-AS81531

AMS-DTL-23053/5 Class 1 and 3

Flammability

UL 224 VW-1

Halogen free

No

Operating Temperature (Metric)

-67°F to +275°F (-55°C to +135°C)

Reach Complaint(Article 33)

Yes

ROHS Complaint

Yes

Certification/Specification WEB

SAE - AS81531 UL 224 125 °C 600V VW-1 SAE - AMS - DTL-23053/5 Class 1 and 3

| | |
|-----------------------------------|-----|
| Package Quantity(Imperial) | 250 |
|-----------------------------------|-----|

Package Quantity (Metric) 250

| | |
|-----------------------|------------|
| Customs Number | 3926909987 |
|-----------------------|------------|

Content Unit(BMEcat) pack

| | |
|--------------------------|-------|
| Labels per Column | 1 |
| Labels per Row | 1 |
| Weight (Metric) | 0.362 |
| Weight (Imperial) | 0.79 |