
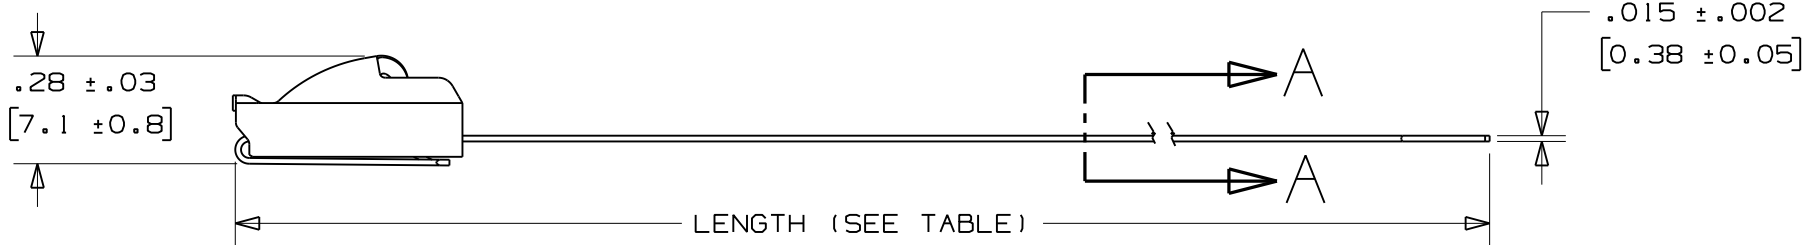


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	MAX. BUNDLE DIA.	PACKAGE QTY.	LENGTH +/- .3" [7]
MLT4DEH-Q316	4" [102]	25	29.5" [749]
MLT6DEH-Q316	6" [152]	25	41.5" [1054]
MLT8DEH-Q316	8" [203]	25	53.5" [1359]

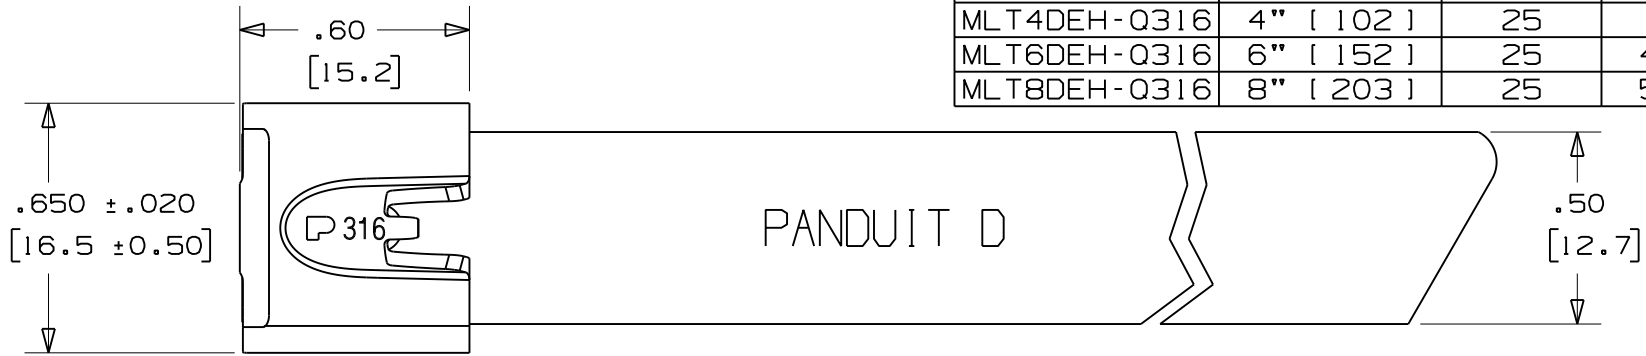


NOTES:

1. APPLICATION TOOLS - ST3MT & RT2HT
2. MINIMUM LOOP TENSILE STRENGTH - 800 LBS. (3560 NEWTONS) WHEN TESTED ON A 3" MANDREL.
3. BRACKETS [] DENOTES DIMENSION IN MILLIMETERS
4. TOLERANCES:
 .XXX = ±.010 [.25]
 .XX = ±.02 [.5]
 .X = ±.03 [.8]
 ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL



SECTION A - A
SCALE: 4x

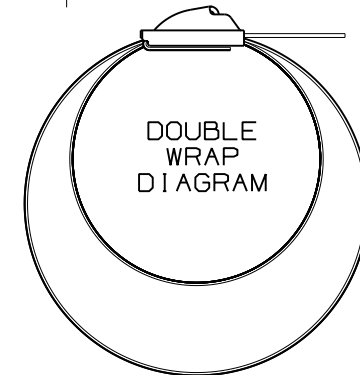

BODY WRAPS AROUND TWO TIMES ENTERING HEAD TWICE (NOT TO SCALE)

N41160BS_DC/01A

							TINLEY PARK, ILLINOIS METAL LOCKING TIE EXTRA HEAVY DUTY 316 STAINLESS STEEL - DOUBLE WRAP CUSTOMER DRAWING						
01A	10/08	JAMB	SKB							ORIG CAD FILE SPEC WAS S41160_01 NOTE 1: APPLICATION TOOL RTIHT REPLACED BY RT2HT			
01	8/04	JAMB	DPN	(A) REMOVED "AISI NO.1 FULL RADIUS" & REPLACED WITH "FULLY ROUNDED"			11907	CCH	JJB				
00	1/04	JAMB	DPN	RELEASED			11307	CCH	JJB				
REV	DATE	BY	CHK	DESCRIPTION			ECN #	PM	CUST	DRAWN BY JAMB	CHK'D DPN	SCALE 2x	DRAWING NO. N41160BS_DC