

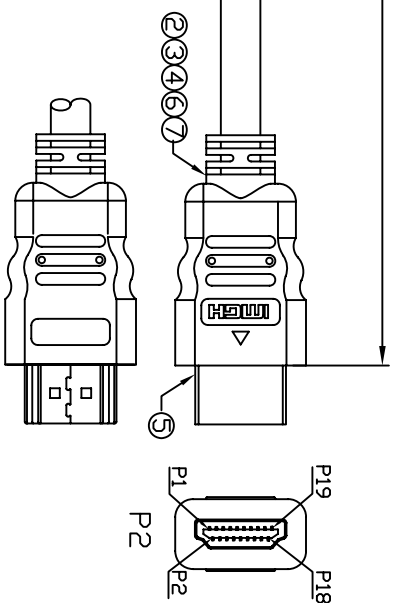



UNIT:mm


3000±30mm

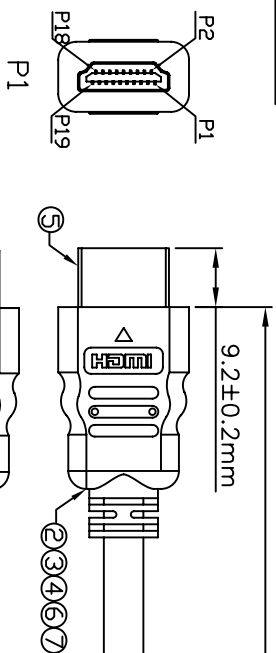

HDMI 19P/M MOLDING TYPE
 INNER MOLD NO.:HJ-CT-091
 OUTER MOLD NO.:HJ-CT-092/093
 (MOULD NO.)

HDMI 19P/M MOLDING TYPE
 INNER MOLD NO.:HJ-CT-091
 OUTER MOLD NO.:HJ-CT-092/093
 (MOULD NO.)

PIN ASSIGNMENT

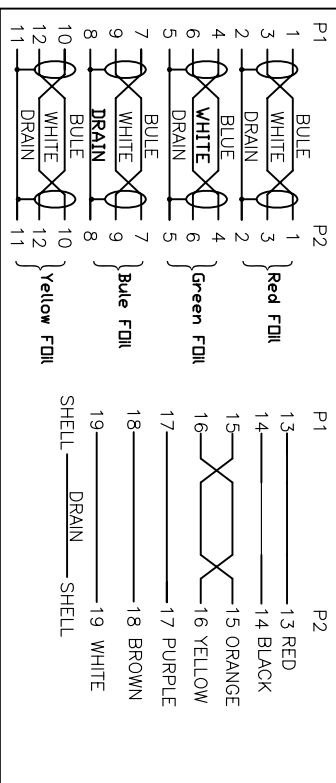

1. ELECTRICAL TEST
 (1).100% open short & miss wire test
 (2).Insulation resistance:DC/300V 5Mohm(Min)
 (3).Contactor resistance:≤3ohm Max
 2.HDTV-DVD TEST:1080P (高清电视测试 : 1080P)
 3.RoHS compliant

⑦	OUT JACKET	16g	OUTER MOLD:45P PVC COLOR:BLACK
⑥	IN JACKET	8g	INNER MOLD:CLEAR LDPE
⑤	CONN	2	HDMI 19P/M SOLDER STYLE SHORT BODY PIN 3U" SHELL-PLATED GOLD INSULATION BLACK
④	TUBE	2	HEAT SHRINK TUBE CLEAR OD0.8*L=20mm.
③	TUBE	10	HEAT SHRINK TUBE CLEAR OD2.0*L=6mm .
②	TUBE	10	HEAT SHRINK TUBE BLACK OD0.8*L=9mm.
①	CABLE	1	28#1/0.32BC+FPD ID0.95*1P+D 1/0.32BC+HDPE ID0.6+AL]*4P+(1/0.32BC+HDPE ID0.70)*1P+(1/0.32BC+HDPE ID0.70)*5C+AL+D 1/0.32BC+B 28#/0.12ALMG+PVC BLACK OD7.3MM

Cnc Tech, LLC Industrial Cable and Connector Technology			
DRAWN BY	zhonghs	DRAWING NO.	VG/LJQ-094-002
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	740-10010-00300
DECIDE BY		DATE	2012-02-14
VERSIONS/EDITEIN	A/0	PROJECTION	

A B C D 4 3 2 1 4 3 2 1