


Lion

PC/104 Format Single Board Computer

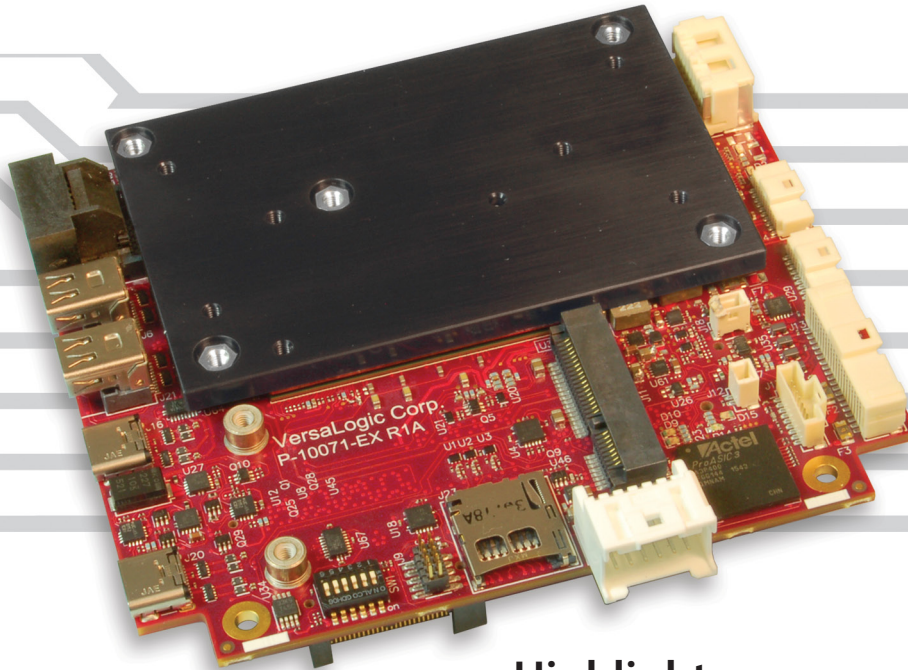

Overview

The Lion is a high-performance single board computer (SBC) which combines Intel's 7th generation Core "Kaby Lake" processor, with a newer PCIe/104 OneBank expansion interface. Compatible with the PCIe/104-Express format, it includes a legacy PCI connector, and a high-speed PCIe connector. This provides flexible system expansion, while leaving more on-board space available for product features. The single bank connector is mechanically and electrically compatible with PCI/104-Express Type 1 and Type 2 modules. In addition, the Lion also contains a full complement of on-board I/O interfaces, including USB 3.0, USB 2.0, mini PCIe expansion socket, TPM chip, multiple serial interfaces, and 8-bits of digital I/O.

The Lion is available with an embedded i7-7600U, i5-7300U, or i3-7100U Kaby Lake processor, providing standard clock rates up to 2.8 GHz and Turbo Boost rates to 3.9 GHz. The Kaby Lake processors feature dual-core CPUs and Hyper-Threading logic allowing up to 4 simultaneous threads to be executed.

As with all VersaLogic products, the Lion is designed to support OEM applications where high reliability and long-term availability are required. Lion is backed by a five-year warranty, 5+ year off-the-shelf availability guarantee, and expert US-based technical support. From application design-in support, to its 10+ year extended life programs, the Lion provides a durable embedded computer solution with an excellent cost of ownership.


Highlights

- 7th Generation Intel® Core™ processor ("Kaby Lake") Dual-core
- PCIe/104 OneBank™ form factor
- TPM (Trusted Platform Module) security chip
- Intel Active Management Technology
- -40° to +85°C Operating Temperature
- Up to 16 GB RAM
- Dual Gigabit Ethernet
- DisplayPort video outputs
- Mini PCIe Socket, with mSATA support
- USB 3.0 and 2.0 ports
- Serial I/O (RS-232/422/485)
- Digital I/O
- Shock & vibration per MIL-STD-202G
- VersaAPI software support
- x86 operating systems (Windows, Linux, etc.)

Features

- 1 Intel “Kaby Lake” Processor**
Up to 2.8 GHz clock rate, dual-core.
- 2 Trusted Platform Module**
(not shown; on back side)
On-board TPM security chip can lock out unauthorized hardware and software access.
- 3 High-performance Video**
Integrated Intel HD Graphics 620 core supports DirectX 12, OpenGL 4.4, and H.264, MPEG-2 encoding/decoding. Dual Mini DisplayPort outputs (DP++). DisplayPort supports HD audio output.
- 4 Network**
Dual Gigabit Ethernet (GbE) with remote boot support.
- 5 SATA**
6 Gb/s SATA port. Supports rotating or solid state SATA drives.
- 6 Mini PCIe Card Sockets**
Supports Wi-Fi modems, GPS receivers, flash data storage with auto-detect mSATA flash storage support, and other mini PCIe modules.
- 7 MicroSD Socket**
Supports removable microSD card solid-state drives.
- 8 Industrial I/O**
 - (a) Two USB 3.0 and four USB 2.0 ports support keyboard, mouse, and other devices.
 - (b) Dual RS-232/422/485 and Dual RS-232 ports, three 8254 timer/counters, and I2C support.
- 9 Digital I/O**
Eight 3.3V digital I/O lines.
- 10 SPI Interface**
Supports SPI and SPX devices, including low cost analog and digital modules.
- 11 Power Input**
5V Input
- 12 Stackable Expansion** *(on back side)*
High speed stack-down PCIe connector

- Fanless Operation**
No moving parts required for CPU cooling in most configurations.
- Memory** *(on back side)*
Up to 16 GB DDR3L memory.
- Industrial Temperature Operation**
-40° to +85°C operation for harsh environments.
- MIL-STD-202G**
Qualified for high shock/vibration environments.
- Software Support**
Compatible with a variety of popular x86 operating systems including Windows, Windows Embedded, Linux, and VxWorks..

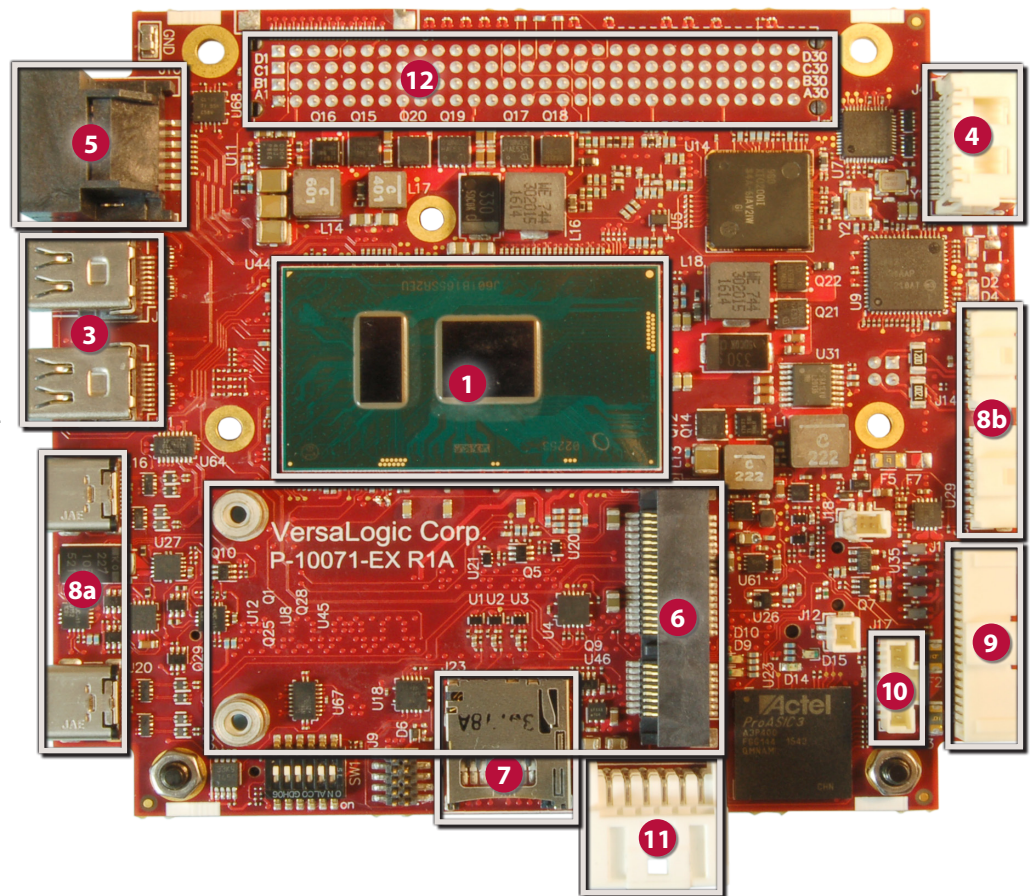

Tailor Lion to Your Exact Requirements

Customization options are available in quantities as low as 100 pieces.

- Conformal Coating
- Custom Labeling
- Custom Screening
- Custom Cabling
- BGA Underfill
- Application-Specific Testing
- Connector & I/O Changes
- BIOS Modifications
- And more –
- Custom Testing
- Software and Drivers
- Revision Locks

Specifications

General				
Board Size	PC/104 Compliant: 108 mm x 96 mm (4.23" x 3.77")			
Weight	175 grams (6.2 oz.)			
Processor	Intel 7th Generation Core i3-7100U, i5-7300U, or i7-7600U dual core. L2 cache. Supports enhanced Intel SpeedStep, Intel 64-bit instructions, Hyper-Threading, AES Instructions, Execute Disable Bit, and Virtualization Technology.			
Input Voltage	5.15V +/- 2%			
Battery	Connector for external 3.0V RTC backup battery.			
Power Requirements §	<i>Model</i>	<i>Idle</i>	<i>Typical</i>	<i>Max.</i>
	VL-EPMe-42xAP-04	3.6W	12.0W	20.4W
	VL-EPMe-42xBP-04	4.0W	12.5W	20.9W
	VL-EPMe-42xCP-04	4.1W	12.5W	21.9W
	VL-EPMe-42xCP-08	4.1W	13.3W	22.4W
	VL-EPMe-42xCP-16	4.1W	13.5W	22.9W
System Reset & Hardware Monitors	All voltage rails monitored. Watchdog timer with programmable timeout. CPU temperature and fan speed monitoring. Push-button reset and power.			
Stackable Bus	PCIe/104 OneBank format. Legacy PCI connector. High speed PCIe connector.			
Manufacturing Standards	Standard	IPC-A-610 Class 2 modified		
	Special Order	IPC-A-610 Class 3 modified		
RoHS	Compliant			

Environmental				
Cooling Options	Bolt-on heat plate standard. Optional Heat sink, Heat sink with fan, heat pipe, and other adaptors available.			
Operating Temperature ◇	<i>Model</i>	<i>Heat Plate**</i>	<i>Heat Sink</i>	<i>Heat Sink + Fan</i>
	VL-EPMe-42E	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
	VL-EPMe-42S	0° to +60°C	0° to +60°C	0° to +60°C
	Ranges shown assume 90% CPU utilization. For detailed thermal information and exceptions, refer to the VL-EPMe-42 Reference Manual. **Heat plate must be kept below 90°C			
Airflow Requirements	Refer to the VL-EPMe-42 Reference Manual for detailed airflow requirements.			
Storage Temperature	-40° to +85°C			
Altitude	Operating*	To 4,570m (15,000 ft.)		
	Storage	To 12,000m (40,000 ft.)		
Thermal Shock	5°C/min. over operating temperature			
Humidity	Less than 95%, noncondensing			
Vibration, Sinusoidal Sweep □	MIL-STD-202G, Method 204, Modified Condition A: 2g constant acceleration from 5 to 500 Hz, 20 min. per axis			
Vibration, Random □	MIL-STD-202G, Method 214A, Condition A: 5.35g rms, 5 min. per axis			
Mechanical Shock □	MIL-STD-202G, Method 213B, Condition G: 20g half-sine, 11 ms duration per axis			

§ Represents operation at +25°C and +5V running Windows 7 with on-board, DisplayPort display, SATA, Ethernet, COM, and USB keyboard/mouse. Typical power computed as the mean value of Idle and Maximum power specifications. Maximum power measured with 95% CPU utilization.

‡ TVS protected port (enhanced ESD protection)

Power pins are overload protected

◇ Derate -1.1°C per 305m (1,000 ft.) above 2,300m (7,500 ft.)

* For extended altitude information contact VersaLogic Sales Dept.

□ MIL-STD-202G shock and vibrate levels were used to illustrate the overall ruggedness of this product. Certification at higher levels or different types of shock or vibration methods per the specific requirements of the application is available. Contact a VersaLogic Sales Engineer for further information.

Specifications are subject to change without notification. Intel and Core are trademarks of Intel Corp. PC/104, PCI/104-Express and PCIe/104 OneBank are trademarks of the PC/104 Consortium. PCI Express is a registered trademark of PCI-SIG. SATA and mSATA are trademarks of the Serial ATA International Organization. SPX is a trademark of VersaLogic Corp. All other trademarks are the property of their respective owners.

Security	
TPM	Trusted Platform Module 2.0 device.

Memory	
System RAM	Up to 16 GB DDR3L (1.35V) SDRAM.
Memory Speed	1600 MHz

Video	
General	Integrated high-performance video. Intel HD 620 - Gen-9 compute architecture, 24 execution units, and GPU Turbo Boost. Supports 3 independent displays. Supports DirectX 12, OpenGL 4.4, OpenCL 2.0.
Hardware Based Acceleration	Decode and Encode of JPEG, MJPEG, MPEG2, AVC, MVC, HEVC 8-bit, VC-1, VP8, VP9.
DisplayPort Interface §	Dual Mini DisplayPort outputs supports DP++ and HDMI signaling (Video and Audio outputs). 24-bit. Up to 4096 x 2304 at 60 Hz. Supports Extended Desktop, Clone, and Twin display modes.

Mass Storage	
Rotating or Solid-State Drives	SATA (Revision 3.0) port. (optional dual SATA available)
Flash storage	mSATA modules (SATA signaling, bootable).
Flash storage	One microSD socket. Supports up to 32 GB. Bootable.

Network Interface	
Ethernet ‡	Two autotetect 10BaseT/100BaseTX/1000BaseT ports with status LEDs. IEEE 1588 Precision Time Protocol (PTP) compatible.
Network Boot Option	Via BIOS extension
Remote Management	Intel vPro Active Management Technology (AMT) (i5-7300U and i7-7600U CPUs only). Supports out-of-band management capabilities including Keyboard-Video-Mouse (KVM) Remote Control, alerting, and event logging.

Device I/O	
USB # ‡	Two USB 3.0 host port (Type-C connectors) and four USB 2.0 host ports.
COM 1 / 2 Interface ‡	Two RS-232/422/485 selectable ports. 16C550 compatible. 460 Kbps.
COM 3 / 4 Interface ‡	Two RS-232 ports. 16C550 compatible. 115 Kbps.
Digital I/O	Eight TTL I/O lines (3.3V). Independently configurable.
I2C	Single I2C interface
Audio	Optional. Use VL-ADR-01 audio interface.
Counter/Timers	Three 8254 compatible Programmable Interval Timers (PITs).

Other I/O	
Mini PCIe / mSATA Socket	Full-size Mini PCIe socket with mSATA signaling support. Supports Wi-Fi modems, GPS receivers, solid state mSATA drives, and other plug-in modules.
SPI Interface	Supports SPI and SPX devices. Supports up to two SPX modules.

Software	
BIOS	Phoenix Technologies UEFI BIOS. Field reprogrammable. Support for USB keyboard/mouse and USB boot.
VersaAPI	VersaLogic Application Programming Interface to support on-board I/O devices.
Sleep Mode	ACPI 3.0. Support for S3 and S4 suspend states and C1 processor state.
Operating Systems	Compatible with most x86 operating systems including Windows, Windows Embedded, Linux, VxWorks, and QNX.

Ordering Information

Model	Processor	Cores	Memory Size GB	Clock Frequency (Normal / Turbo)	Graphics Frequency (Normal / Boost)	vPro Capabilities	Operating Temp.	Cooling
VL-EPMe-42EAP-04	i3-7100U	Dual	4	2.4 GHz / none	300 MHz / 1.00 GHz	No	-40° to +85°C	Heat plate
VL-EPMe-42EBP-04	i5-7300U	Dual	4	2.6 GHz / 3.5 GHz	300 MHz / 1.10 GHz	Yes	-40° to +85°C	Heat plate
VL-EPMe-42ECP-04	i7-7600U	Dual	4	2.8 GHz / 3.9 GHz	300 MHz / 1.15 GHz	Yes	-40° to +85°C	Heat plate
VL-EPMe-42ECP-08	i7-7600U	Dual	8	2.8 GHz / 3.9 GHz	300 MHz / 1.15 GHz	Yes	-40° to +85°C	Heat plate
VL-EPMe-42ECP-16 **	i7-7600U	Dual	16	2.8 GHz / 3.9 GHz	300 MHz / 1.15 GHz	Yes	-40° to +85°C	Heat plate
VL-EPMe-42SAP-04	i3-7100U	Dual	4	2.4 GHz / none	300 MHz / 1.00 GHz	No	0° to +60°C	Heat plate
VL-EPMe-42SBP-04	i5-7300U	Dual	4	2.6 GHz / 3.5 GHz	300 MHz / 1.10 GHz	Yes	0° to +60°C	Heat plate
VL-EPMe-42SCP-08	i7-7600U	Dual	8	2.8 GHz / 3.9 GHz	300 MHz / 1.15 GHz	Yes	0° to +60°C	Heat plate
VL-EPMe-42SCP-16 **	i7-7600U	Dual	16	2.8 GHz / 3.9 GHz	300 MHz / 1.15 GHz	Yes	0° to +60°C	Heat plate

** Special order product. Contact VersaLogic Sales for minimum order quantities and lead time.


Other configurations are possible. Please contact VersaLogic Sales at (503) 747-2261 to discuss requirements!

Accessories

Part Number	Description
Cable Kit	
VL-CKR-LION	Development Cable kit for EPMe-42. Includes: VL-4005, 0702, 1014, 1205, 1604, 2402, 2032, HDW-401, and 105.
VL-CBR-4005	I/O Cable Assembly, Cable & Paddle Board, RoHS
VL-CBR-0702	SATA cable latching, 20"
VL-CBR-1014	1 mm 10-pin Pico-Clasp to two DB-9 Cable, 12", RoHS
VL-CBR-1205	12-pin Micro-clasp to ATX 5V power adapter cable 7"
VL-CBR-1604	Dual Ethernet cable – rugged latching, 12"
VL-CBR-2402	USB 3.0 Type-C plug to Type-A socket cable
VL-CBR-2032	miniDisplayPort to 15-pin VGA adapter (Commercial Temperature) 6"
VL-HDW-105	Standoff package (metric thread) 0.6"
VL-HDW-401	Thermal compound paste. For attaching heat plates and sinks
Thermal Options	
VL-HDW-406	Passive Heat Sink to mount on product heat plate.
VL-HDW-413	Heat Sink + Cooling fan assembly to mount on product heat plate.
VL-HDW-408	Heat Pipe system to mount on product heat plate.
Cables	
VL-CBR-0203	2-pin Latching Battery Module, 6"
VL-CBR-0901	9-pin Pico-Clasp to Dual SPX cable, 8"
VL-CBR-2031	miniDisplayPort to miniDisplayPort, 36"
VL-CBR-2033	miniDisplayPort to HDMI Active Adapter, 6" (Commercial Temp.)
Audio	
VL-ADR-01S	USB to Audio Adapter
Solid-State Storage (flash memory)	
VL-F41-xxxx	microSD card (SDIO), SLC, industrial temp.
Hardware	
VL-PS-ATX12-300A	Bench-top / development power supply
VL-HDW-106	0.6" standoffs, English thread (four per kit)
VL-HDW-108	Mini PCIe / mSATA hardware kit (metric thread) 2.5 mm
Miscellaneous	
VL-HDW-111	Half to Full Size Mini PCIe Adapter kit. Metal adapter and screws (2)
VL-HDW-203	PC/104 extractor tool (metal)

Expansion Modules

Part Number	Description	Form Factor
Network		
VL-MPEe-W2E	Wi-Fi 802.11 a/b/g/n	Mini PCIe
VL-MPEe-E3E	Gigabit Ethernet adapter	Mini PCIe
VL-MPEe-FW1E	1394 Firewire Module, Industrial Temp. (PCIe Signaling)	Mini PCIe
Serial I/O		
VL-MPEe-U2E	Quad serial plus twelve GPIOs	Mini PCIe
Analog & Digital I/O		
VL-MPEe-A1E	Analog input (12-bit resolution)	Mini PCIe
VL-MPEe-A2E	Analog input (16-bit resolution)	Mini PCIe
VL-SPX-1	Analog Input Module 8-Channels	SPX
VL-SPX-2	Digital I/O Module 16-lines	SPX
VL-SPX-4	Analog Output Module 4-channels 12-bit	SPX
VL-SPX-5	Solid State Switch Module 8-channel	SPX
GPS		
VL-MPEu-G2E	GPS receiver	Mini PCIe
Video		
VL-EPMp-V7E	Video Expansion Module: VGA and LVDS	PCI-104
VL-MPEe-V5E	VGA and LVDS Interface	Mini PCIe
Solid-State Storage (flash memory)		
VL-MPEs-F1Exx	mSATA module (4/16/32 GB) (SATA)	Mini PCIe
Adapters		
VL-MPEs-S3E	SATA adapter	Mini PCIe
VL-EPMp-P2E	PCI-104 Mini PCIe socket x2 Adapter	PCI-104

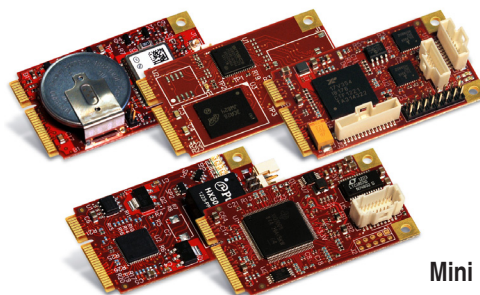

Mini PCIe Modules

Take the Risk out of Embedded Computing

Whether it's selecting the optimum solution for your application, sharing expertise during development, or on-time delivery of production products, VersaLogic is here to make sure your project goes smoothly from initial concept through the extended life of your program. Contact us today to learn more.

ISO 9001:2008 Certified

Verisys Registrars
High Value Auditing

